


# 22" Wide Open Frame Monitor

## DMXX3338/t.b.d.



The 22" Wide Open Frame Monitor, built-in 1.000 nits high brightness for sunlight readable application. Features wide operating temperature, high brightness, AOT optical bonding, touch screen capable, and customized mechanical design; fulfill the demand for extreme environments. It offers the best visibility, performance and cost effective value. The high level of brightness together with fast response time and backlight technology, the monitor brings remarkable display quality. And guaranteeing product life cycle longevity, stability, and reliability. Perfectly suitable for kiosk, ATM, POS, marine, military, medical, transportation, and outdoor industrial application.



### Main Features

- Sunlight readable
- Wide viewing angle
- High contrast ratio
- Long lamp life
- Fast response time
- Thin and light

### Technical Specifications

#### Display features

- Description: 22" Wide Open Frame LCD Display, 1.000 nits, WSXGA
- Display Area: 473.76 x 296.1mm
- Brightness: 1.000 cd/m<sup>2</sup>
- Resolution: 1.680x1.050 (WSXGA+)
- Contrast Ratio: 1.000 : 1
- Pixel Pitch: 0.282(H) x 0.282(V) mm
- Viewing Angle: +85° to -85°(H), +80° to -80°(V)
- Display Colors: 16.7M
- Response Time (Typical): 5ms
- Power Input: 12VDC
- Power Consumption: 70W
- Dimensions: 545x370x60 mm
- Weight: 5.68kg (net)

#### Optional

- AOT
- TouchScreen
- Waterproof

#### Control Board (Optional)

- VGA+Audio
- VGA+DVI
- VGA+CVBS+S-Video+Audio (Optional DVI / Component)
- VGA+DVI (Optional S-Video/ Component / Audio)

#### F/R Control Button


- 5 Key: Power Switch, Menu, Select (+,-), Auto
- 4 Key: Power Switch, Menu, Select (+,-)

#### OSD Menu


- Brightness, Contrast, H/V Position, Color, Phase, Clock...

# 22" Wide Open Frame Monitor

DMXX3338/t.b.d.



## Outline Dimensions

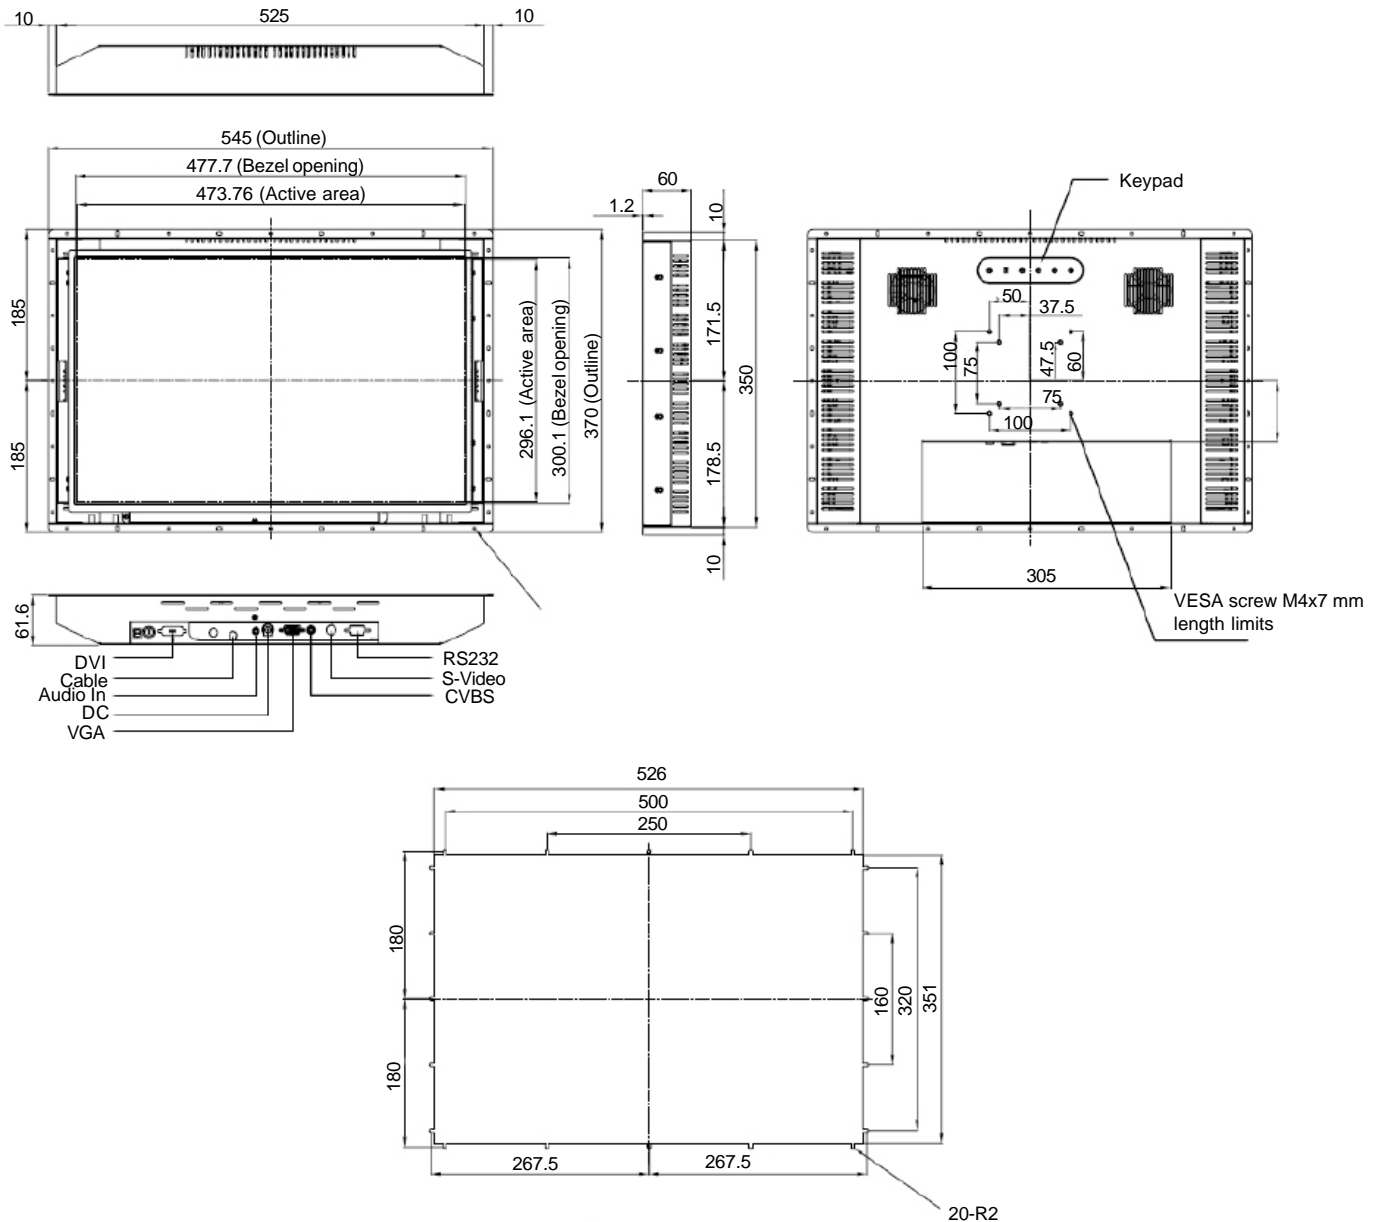

## Ordering Information

t.b.d. 22" Wide Open Frame Monitor, w/o TouchScreen  
LED Backlight, 1.000 nits, WSXGA resol., VGA, DVI, S-Video

t.b.d. 22" Wide Open Frame Monitor w/o TouchScreen  
LED Backlight, 1.000 nits, WSXGA resol., VGA, DVI, S-Video, Audio