


DSA-132

31.5" Full HD Digital Signage System with Intel® Celeron® M Processor up to 2.0 GHz/Intel® Core™2 Duo Processor up to 2.53 GHz

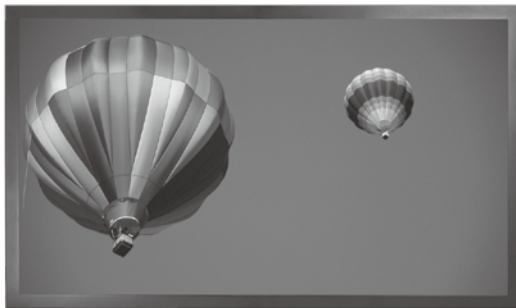

Specifications

| | | |
|--------------------|---|---|
| Front Bezel | Custom Logo | |
| LCD Panel | Size | 31.5" |
| | Contrast | 2500 : 1 |
| | Pixel Pitch | 363 x 363 (um) |
| | Viewing Angle (H/V) | 178° x 178° |
| | Response Time | 6.5ms |
| | Color | 16.7M |
| | Brightness (cd/m²) | 500 |
| Board | CPU | Intel® Celeron® M 575 2.0 GHz or Intel® Core™2 Duo T9400 2.53 GHz processor |
| | Onboard Graphics | Intel® GM45 |
| | Front Side Bus | 1033 MHz |
| | Memory | 2 x 204-pin DDR3 max. up to 2GB |
| | HDD | 1 x 2.5" HDD |
| | Watchdog Timer | 255 levels, 0~255 sec. |
| | I/O | 1 x VGA or DVI out, 4 x USB 2.0 |
| Ethernet | 1 x 10/100/1000Mbps Ethernet | |
| Expansion Slot | 1 x PCI Express Mini Card (802.11 wireless LAN) | |
| Sensors | Internal & external temperature | |
| | Motion detection (optional) | |
| | LCD video alive detection | |
| | Backlight and external brightness sensor | |
| Audio | 2 x 5W speaker | |
| Touchscreen | Infrared (IR) type (optional) | |
| Power Supply | 450W, 100-240 V _{AC} | |
| Dimensions | 767mm (30.2") (W) x 111 mm (4.4") (D) x 457mm (18") (H) | |
| Packing dimensions | 767mm (30.2") (W) x 111 mm (4.4") (D) x 457mm (18") (H) | |
| Weight (net/gross) | 27.1 kg (59.7 lb)/31.1 kg (68.5 lb) | |
| Environmental | 0 ~ +40° C, operation, 10% - 95% relative humidity | |

Features



- Pluggable CPU board: Easy system configuration and maintenance
- 31.5" wide TFT LCD - Full HD 1920 x 1080p
- Intel® Celeron® M 575 2.0 GHz or Intel® Core™2 Duo T9400 2.53 GHz processor
- Self diagnosis and built-in sensors: external temperature, LCD color and LCD backlight
- Motion detection sensors (optional)
- Built-in IR touch screen (optional)
- VESA FPM/PMI compliant flat panel mounting



Pluggable CPU board

Ordering Information

| | |
|------------------|--|
| DSA-132 | 31.5" Full HD digital signage with Intel® GM45 |
| DSA-132T | 31.5" Full HD touch digital signage with Intel® GM45 |
| Motion detection | PIR sensor |

Dimensions

