

Fanless Box-PC 3140P2E

PKBX5093/-2/-3



Utilizing the Intel® GM45 chipsets, the Fanless Box-PC 3140 is highly scalable supporting a wide variety of Intel Core™ 2 Duo and Celeron® processors. Using the Intel® graphics media accelerator 4500MHD, the rugged Fanless Box-PC 3140 delivers exceptional graphics performance with notable rates of data transfer. The Fanless Box-PC 3140 provides a number of important features required by image processing operation, including dual-channel DDR3 memory, two Gigabit Ethernet LANs, auto-direction control on RS485 interface. On top of that, the

Fanless Box-PC 3140 supports dual independent displays through 2x VGA, DVI or LVDS outputs. Housed in a robust aluminum chassis, the Fanless Box-PC 3140 of fanless design offers noise-free, ultra reliable operating in the most demanding of industrial environment. The Fanless Box-PC 3140 series is an idea system for industrial automation, machine automation, Automated Optical Inspection (AOI), visual inspection, video surveillance, image mapping and face recognition markets.



Main Features

- Support Intel® Core™ 2 Duo/Celeron® processor
- Intel® GM45 chipsets
- Dual Intel® 82574L Gigabit Ethernet ports
- Dual VGA or VGA/DVI independent display
- 3x RS232 and 1x RS232/422/485 with auto direction control
- One external locked CF socket
- On-board DC to DC power design to support 16 to 30VDC power input
- Support ATX power mode and PXE/WOL/LAN Teaming

Technical Specifications

Main Board

- Support Intel® Core™ 2 Duo processor P8400 (3M Cache, 2.26GHz, 1.066MHz FSB)
- Support Intel® Celeron® processor 575 (1M Cache, 2.00GHz, 667MHz FSB)

Main Memory

- 2x 240-pin DIMM, up to 4GB DDR3 800/1.066MHz SDRAM, unbuffered and non-ECC

Chipset

- Intel® GM45 Graphics and Memory Controller Hub
- Featuring the Mobile Intel® Graphics Media Accelerator 4500MHD
- Intel® 82801IBM I/O Controller Hub

Device

- 1x 2.5" SATA HDD drive bay
- One external locked CF card socket
- Optional power adapter

Expansion

- One PCI and one PCIe expansions
- Max. 1x 169 mm and 1x 240 mm (with 2.5" HDD installed)
- Max. 2x 240 mm (without 2.5" HDD installed)

I/O Interface-Front

- ATX power on/off switch
- HDD Access/Power status LED
- 1x Front Access CF card socket
- 2x USB 2.0 ports

I/O Interface-Rear

- 2-pin Remote Power on/off switch
- 16 to 30VDC input
- 1x PS/2 for Keyboard/Mouse
- 1x DB25 parallel port (optional GPIO or LVDS interface)
- 1x DB44 serial port for 4x RS232 (COM2: RS232/422/485 with Auto Flow Control)
- 2x Gbe LAN ports
- 4x USB 2.0 ports
- 1x DB15 VGA port
- 1x DVI-I port (DVI-D and VGA)
- 1x Speaker-out and Line-in

Power Requirements

- ATX power mode
- On-board DC to DC power support from 16 to 30VDC

Dimensions and Construction

- 195 x 268 x 107 mm (W x D x H)
- Aluminum chassis with fanless design

Fanless Box-PC 3140P2E

PKBX5093/-2/-3




Environment

- Operating Temperature:
Ambient with air flow: -5°C to 55°C
(According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C to 80°C
- Relative humidity: 10% to 93% (non-condensing)

Certifications

- CE approval
- FCC Class B

Dimension Drawing

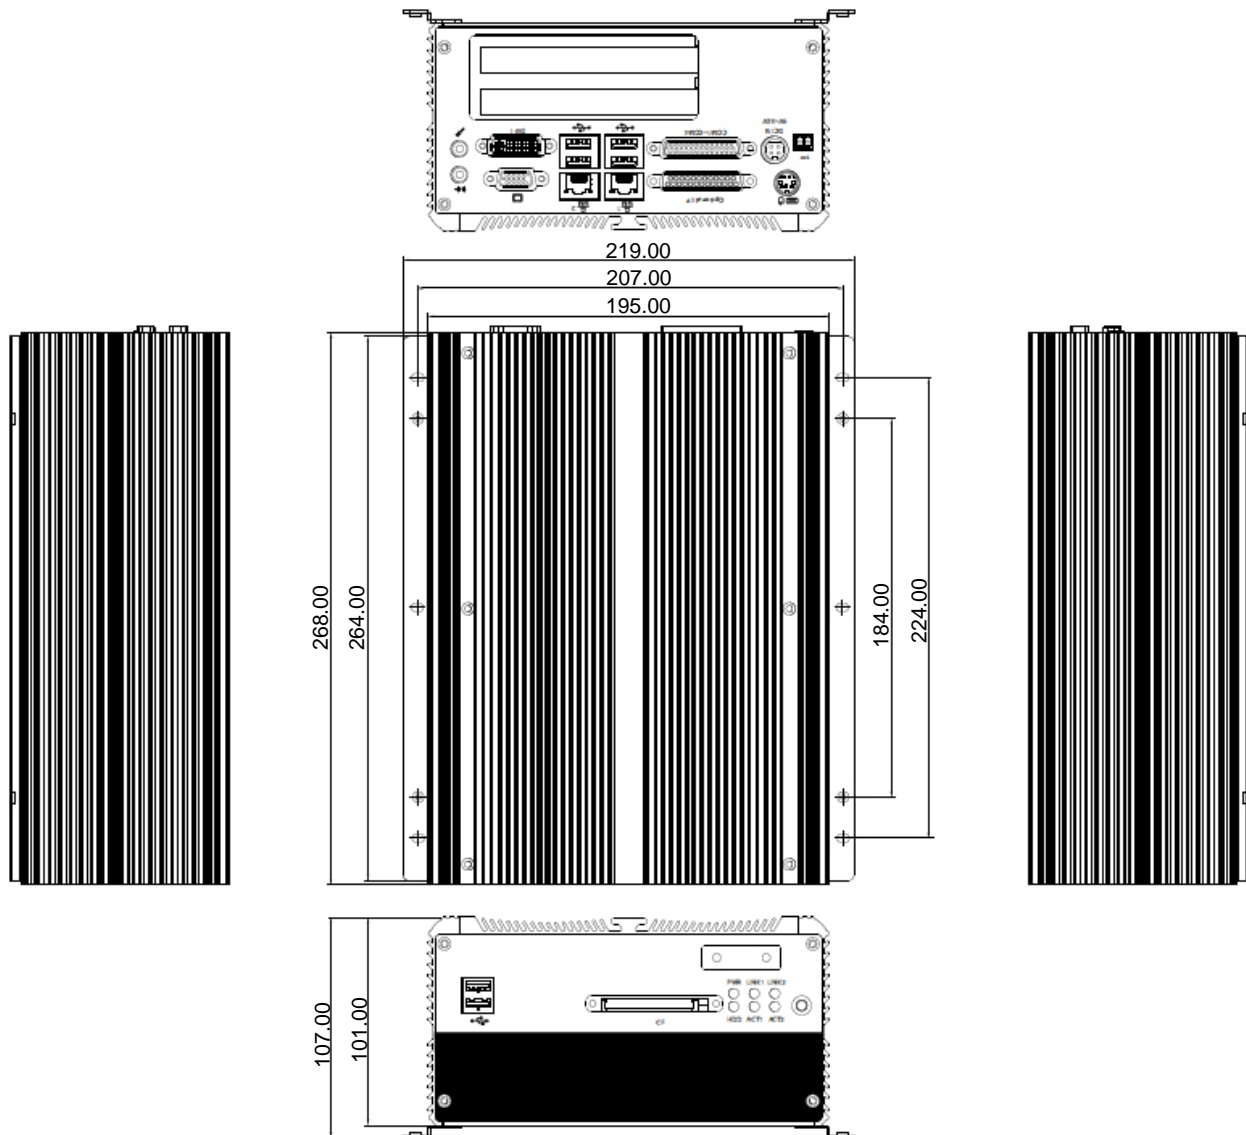

Ordering Information

PKBX5093	Fanless Box-PC 3140P2E Barebone w/o CPU with one PCI and one PCI express expansion slot	PKBX5093-2	Fanless Box-PC 3140P2E P8400 Core2Duo 2.26GHz with 1x PCI and 1xPCI express expansion slot
PKBX5093-3	Fanless Box-PC 3140P2E M575 Celeron 2GHz with one PCI and one PCI express expansion slot		