


15" LCD-TFT Monitor

t.b.d.



The 15" LCD-TFT Monitor, built-in 1.600 nits high brightness for sunlight readable display. It offers the best visibility, performance and cost effective value. The high level of brightness together with the optimal contrast ratio renders high quality images and enhances legibility. With its fast response time and LED backlight technology, the monitor brings remarkable display quality and durability for your applications. Suitable for marine, military, medical, transportation, and industrial application.

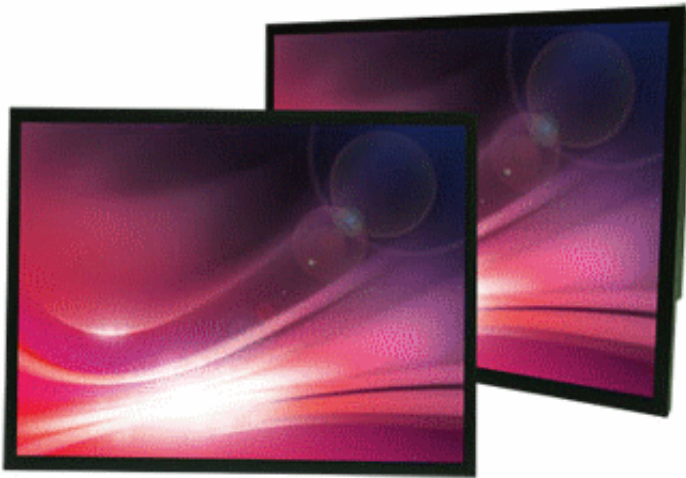

Main Features

- Sunlight readable
- LED backlight
- High shock and vibration resistance
- Low power consumption
- Wide temperature range (-20°C to 70°C)
- High uniformity (90%)
- Low EMI noise
- Wide dimming
- Life expectancy (70.000 hrs)

Technical Specifications

Display features

- Description: 15" TFT LCD monitor, LED Backlight 1600 nits, XGA
- Display Area: 304.128 x 228.096 mm
- Brightness: 1.600 cd/m²
- Resolution: 1.024 x 768 (XGA)
- Contrast Ratio: 600 : 1
- Pixel Pitch: 0.297(H) x 0.297(V) mm
- Viewing Angle: +80°~-80°(H), +80°~-80°(V)
- Display Colors: 16.7M
- Response Time: 8ms (Typical)
- Power Input: 12VDC
- Power Consumption: 23W
- Dimensions: 326.5x253.5x31mm
- Weight: 1.2kg (net)

Control Board (Optional)

- VGA+Audio
- VGA+DVI
- VGA+CVBS+S-Video+Audio (Optional DVI / Component)
- VGA+DVI (Optional S-Video/ Component / Audio)

F/R Control Button

- 5 Key: Power Switch, Menu, Select (+,-), Auto
- 4 Key: Power Switch, Menu, Select (+,-)

OSD Menu

- Brightness, Contrast, H/V Position, Color, Phase, Clock


Optional

- AOT
- TouchScreen
- Waterproof

15" LCD-TFT Monitor

t.b.d.

Outline Dimensions

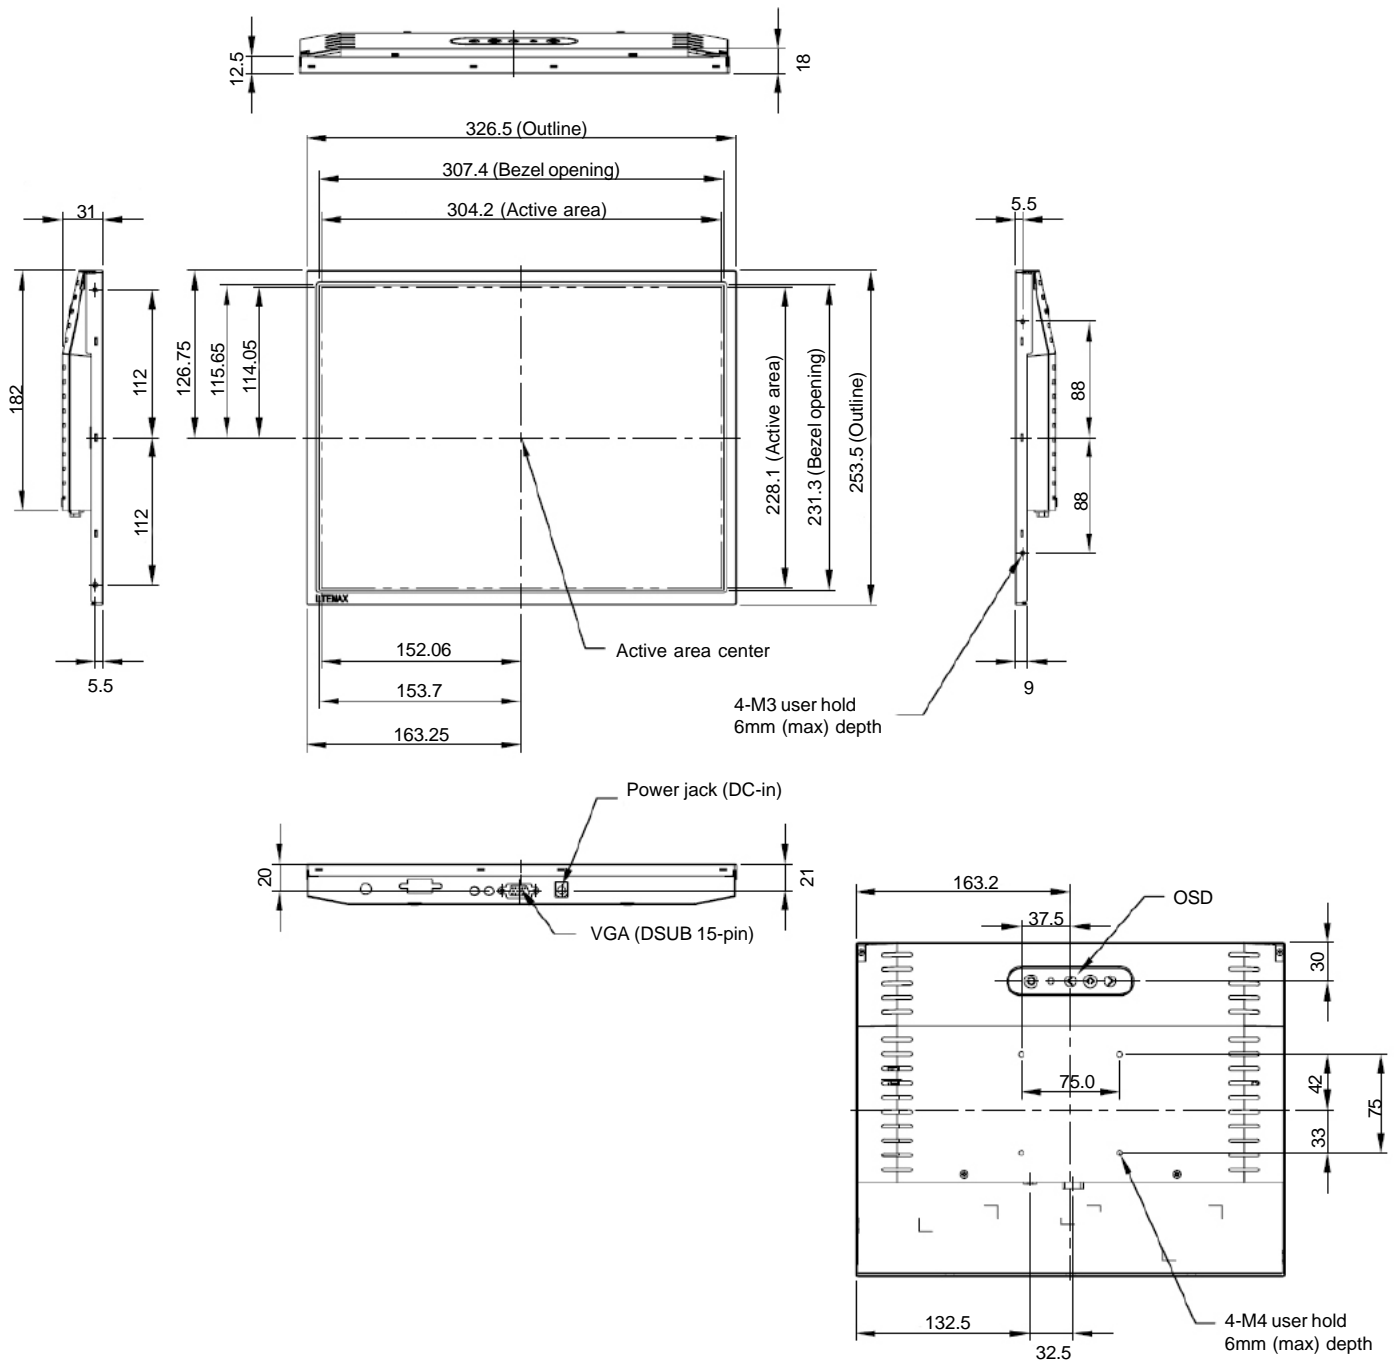

Ordering Information

t.b.d. 15" LCD-TFT Monitor w/o TouchScreen
LED Backlight, 1.600 nits, XGA resol., VGA

t.b.d. 15" LCD-TFT Monitor w/o TouchScreen
LED Backlight, 1.600 nits, XGA resol., VGA, 3-in-1 carton