

15" Open Frame Monitor

t.b.d.



The 15" Open Frame Monitor, built-in 1.600 nits high brightness for sunlight readable application. Features wide operating temperature, high brightness, AOT optical bonding, touch screen capable, and customized mechanical design; fulfill the demand for extreme environments. It offers the best visibility, performance and cost

effective value. The high level of brightness together with fast response time and LED backlight technology, the monitor brings remarkable display quality. And guaranteeing product life cycle longevity, stability, and reliability. Perfectly suitable for kiosk, ATM, POS, marine, military, medical, transportation, and outdoor industrial application.



Main Features

- Sunlight readable
- LED backlight
- High shock and vibration resistance
- Long power consumption
- Wide temperature range
- High uniformity
- Low EMI noise
- Wide dimming
- Multiple mounting choices
- Life expectancy

Technical Specifications

Display features

- Description: 15" Open Frame LCD Display, LED Backlight
- 1.600 nits, XGA
- Display Area: 304.128 x 228.096 mm
- Brightness: 1.600 cd/m²
- Resolution: 1.024 x 768 (XGA)
- Contrast Ratio: 700 : 1
- Pixel Pitch: 0.297(H) x 0.297(V) mm
- Viewing Angle: +80° to -80°(H), +80° to -80°(V)
- Display Colors: 16.7M
- Response Time: 8ms (Typical)
- Power Input: 12VDC
- Power Consumption: 23W
- Dimensions: 350.5x253.5x31 mm
- Weight: 1.5kg (net)

Control Board (Optional)

- Option 1: VGA+Audio
- Option 2: VGA+DVI
- Option 3: VGA+CVBS+S-Video+Audio (Optional DVI/Component)
- Option 4: VGA+DVI (Optional S-Video/Component/Audio)

F/R Control Button

- 5 Key: Power Switch, Menu, Select (+,-), Auto
- 4 Key: Power Switch, Menu, Select (+,-)

OSD Menu

- Brightness, Contrast, H/V Position, Color, Phase, Clock, Management

Optional

- TouchScreen
- Waterproof
- AOT

Applications


- Marine
- Military
- Medical
- Transportation
- Industrial

15" Open Frame Monitor

t.b.d.



Dimension Drawing

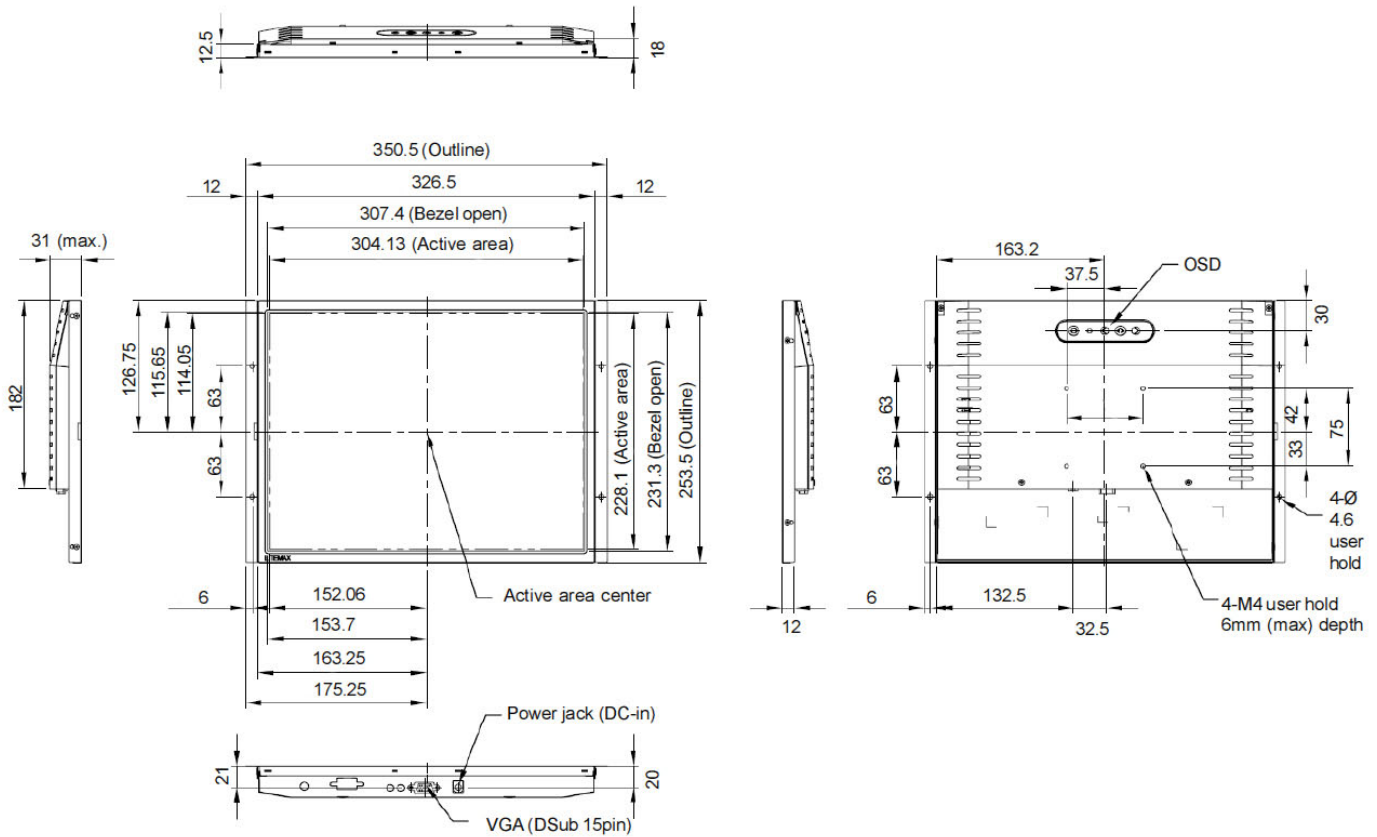

Ordering Information

t.b.d.	15" Open Frame Monitor w/o TouchScreen LED, 1.600 nits, XGA resol., VGA	t.b.d.	15" Open Frame Monitor w/o TouchScreen LED, 1.600 nits, XGA resol., VGA, 3-in-1 carton
t.b.d.	15" Open Frame Monitor w/USB TouchScreen LED, 1.600 nits, XGA resol., VGA, 1-in-1 carton	t.b.d.	15" Open Frame Monitor w/USB TouchScreen LED, 1.600 nits, XGA resol., VGA, 3-in-1 carton
t.b.d.	15" Open Frame Monitor w/USB TouchScreen LED, 1.600 nits, XGA resol., VGA		