

15" Open Frame Monitor

t.b.d.



The 15" Open Frame Monitor features wide operating temperature, AOT optical bonding, touch screen capable, and customized mechanical design; fulfill the demand for extreme environments. It offers the best visibility, performance and cost effective value. The monitor brings

remarkable display quality, and guaranteeing product life cycle longevity, stability, and reliability. Perfectly suitable for kiosk, ATM, POS, marine, military, medical, transportation, and outdoor industrial application.



Main Features

- Wide viewing angle
- High contrast ratio
- Wide temperature range
- High uniformity
- Fast response time
- Thin and light

Technical Specifications

Display features

- Description: 15" Open Frame LCD Display, 250 nits, XGA
- Display Area: 304.128 x 228.096 mm
- Brightness: 250 cd/m²
- Resolution: 1.024 x 768 (XGA)
- Contrast Ratio: 600 : 1
- Pixel Pitch: 0.297(H) x 0.297(V) mm
- Viewing Angle: 160°(H), 160°(V)
- Display Colors: 16.7M
- Response Time: 8ms (Typical)
- Power Input: 12VDC
- Power Consumption: 28W
- Dimensions: 352x319.4x46.8 mm
- Weight: 3.42kg (net)

Control Board (Optional)

- Option 1: VGA+Audio
- Option 2: VGA+DVI
- Option 3: VGA+DVI (Optional S-Video/Component/Audio)

F/R Control Button

- 5 Key: Power Switch, Menu, Select (+,-), Auto
- 4 Key: Power Switch, Menu, Select (+,-)

OSD Menu

- Brightness, Contrast, H/V Position, Color, Phase, Clock, Management

Optional

- TouchScreen
- Waterproof
- AOT

Applications


- Marine
- Military
- Medical
- Transportation
- Industrial

15" Open Frame Monitor

t.b.d.



Dimension Drawing

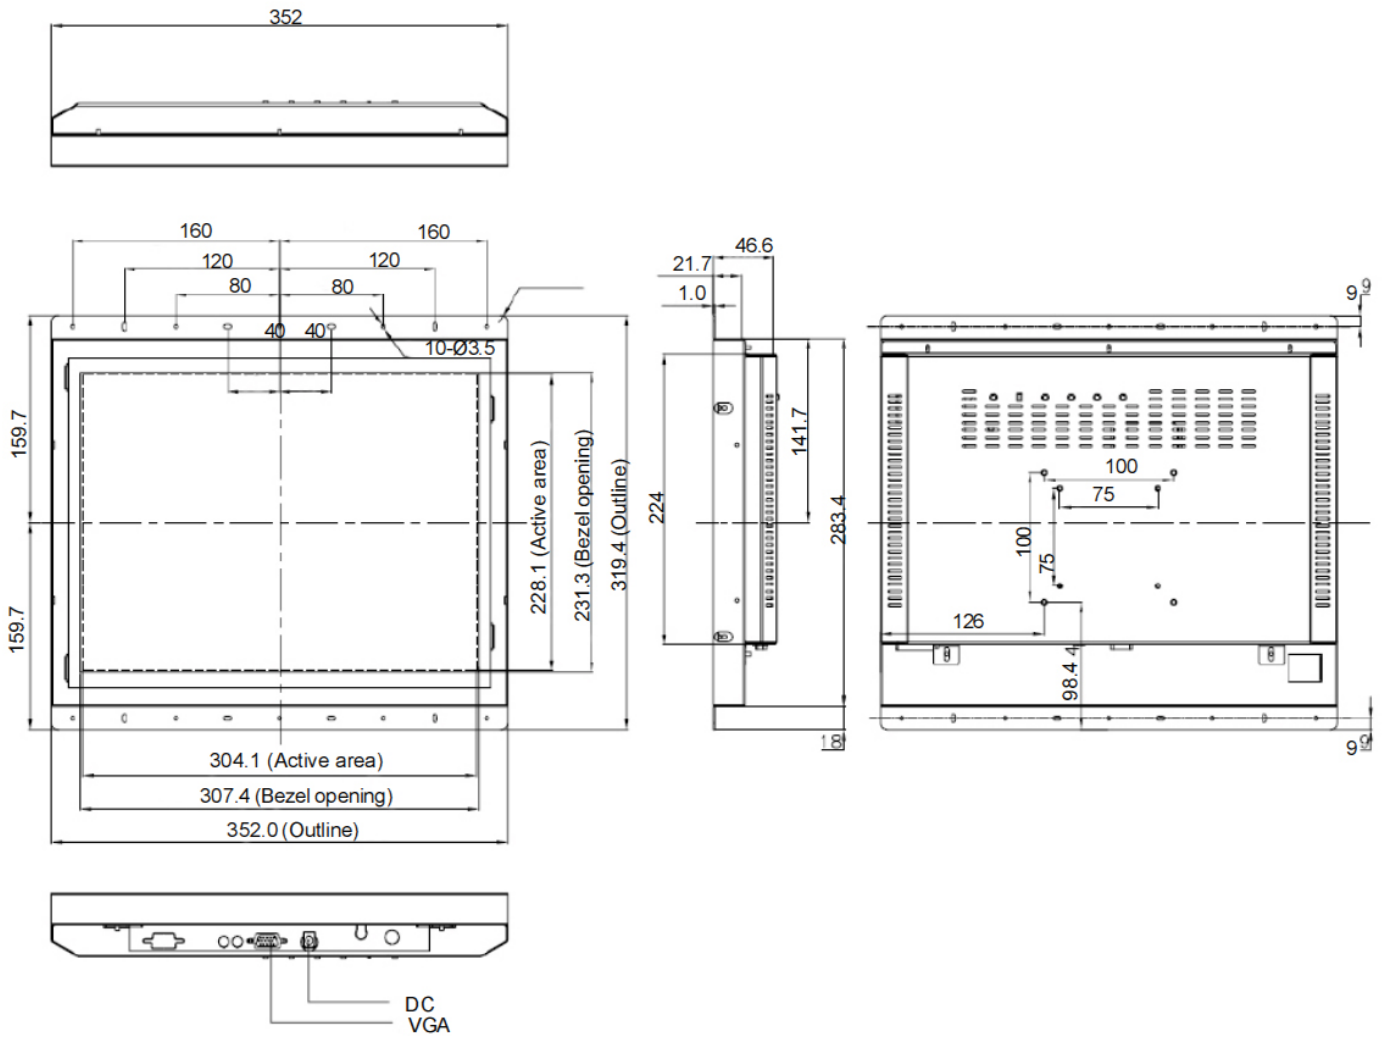

Ordering Information

t.b.d. 15" Open Frame Monitor, w/o TouchScreen
LED Backlight, 250 nits, XGA resol., VGA