

17" Open Frame Monitor

t.b.d.



The 17" Open Frame Monitor features wide operating temperature, AOT optical bonding, touch screen capable, and customized mechanical design; fulfill the demand for extreme environments. It offers the best visibility, performance and cost effective value. The monitor brings remarkable display quality, and guaranteeing product life cycle longevity, stability, and reliability. Perfectly suitable for kiosk, ATM, POS, marline, military, medical, transportation, and outdoor industrial application.



Main Features

- Wide viewing angle
- High contrast ratio
- Wide temperature range
- High uniformity
- Fast response time
- Thin and light

Technical Specifications

Display features

- Description: 17" Open Frame LCD Display, 300 nits, SXGA
- Display Area: 337.92 x 270.336 mm
- Brightness: 300 cd/m²
- Resolution: 1.280x1.024 (SXGA)
- Contrast Ratio: 800 : 1
- Pixel Pitch: 0.264(H) x 0.264(V) mm
- Viewing Angle: 170°(H), 160°(V)
- Display Colors: 16.7M
- Response Time: 8ms (Typical)
- Power Input: 12VDC
- Power Consumption: 25.8W
- Dimensions: 382.9x355.2x53.2 mm
- Weight: 4.93kg (net)

Optional

- AOT
- TouchScreen
- Waterproof

Control Board (Optional)

- VGA+Audio
- VGA+DVI
- VGA+DVI (Optional S-Video/ Component / Audio)

F/R Control Button

- 5 Key: Power Switch, Menu, Select (+,-), Auto
- 4 Key: Power Switch, Menu, Select (+,-)

OSD Menu


- Brightness, Contrast, H/V Position, Color, Phase, Clock

17" Open Frame Monitor

t.b.d.



Outline Dimension

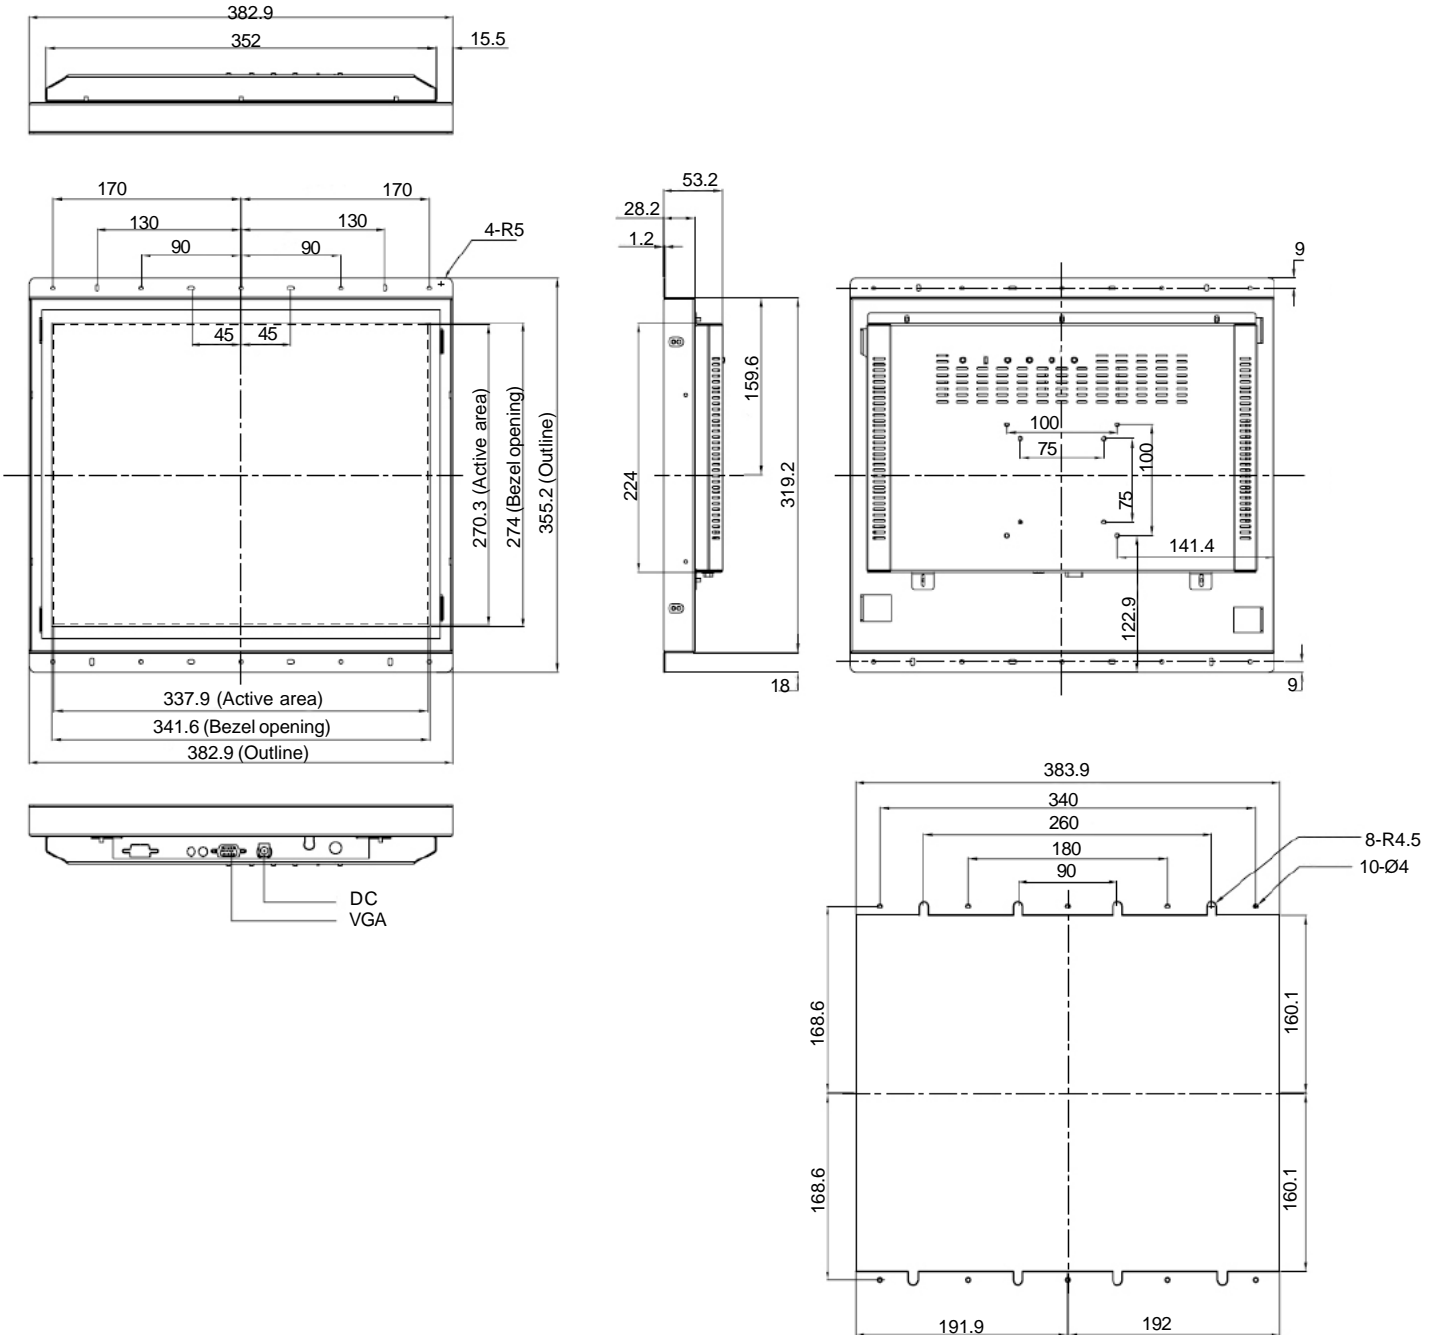

Ordering Information

t.b.d. 17" Open Frame Monitor, w/o TouchScreen
LED Backlight, 300 nits, SXGA resol., VGA