


32" Wide Open Frame Monitor

t.b.d.



32" Wide Open Frame Monitor, built-in 1.000 nits high brightness for sunlight readable application. Features wide operating temperature, high brightness, AOT optical bonding, touch screen capable, and customized mechanical design; fulfill the demand for extreme environments. It offers the best visibility, performance and cost effective value. The high level of brightness together with fast response time and backlight technology, the monitor brings remarkable display quality. And guaranteeing product life cycle longevity, stability, and reliability. Perfectly suitable for kiosk, ATM, POS, marine, military, medical, transportation, and outdoor industrial application.



Main Features

- Sunlight Readable
- Wide Viewing Angle
- High Contrast Ratio
- Long Lamp Life
- Fast Response Time
- Thin and Light

Technical Specifications

Display features

- Description: 32" Wide Open Frame LCD Display, 1.000 nits, WXGA
- Display Area: 697.68 x 392.26mm
- Brightness: 1.000 cd/m²
- Resolution: 1.366x768 (WXGA)
- Contrast Ratio: 3.000 : 1
- Pixel Pitch: 0.51075(H) x 0.51075 (V) mm
- Viewing Angle: +89° to -89°(H), +89° to -89°(V)
- Display Colors: 16.7M
- Response Time: 6.5ms (Typical)
- Power Input: 12VDC
- Power Consumption: 160W
- Dimensions: 771.6x426.4x91mm
- Weight: 26.5kg (net)

Control Board (Optional)

- VGA+Audio
- VGA+DVI
- VGA+CVBS+S-Video+Audio (Optional DVI / Component)
- VGA+DVI (Optional S-Video/ Component / Audio)

F/R Control Button


- 5 Key: Power Switch, Menu, Select (+,-), Auto
- 4 Key: Power Switch, Menu, Select (+,-)

OSD Menu


- Brightness, Contrast, H/V Position, Color, Phase, Clock

32" Wide Open Frame Monitor

t.b.d.



Outline Dimension

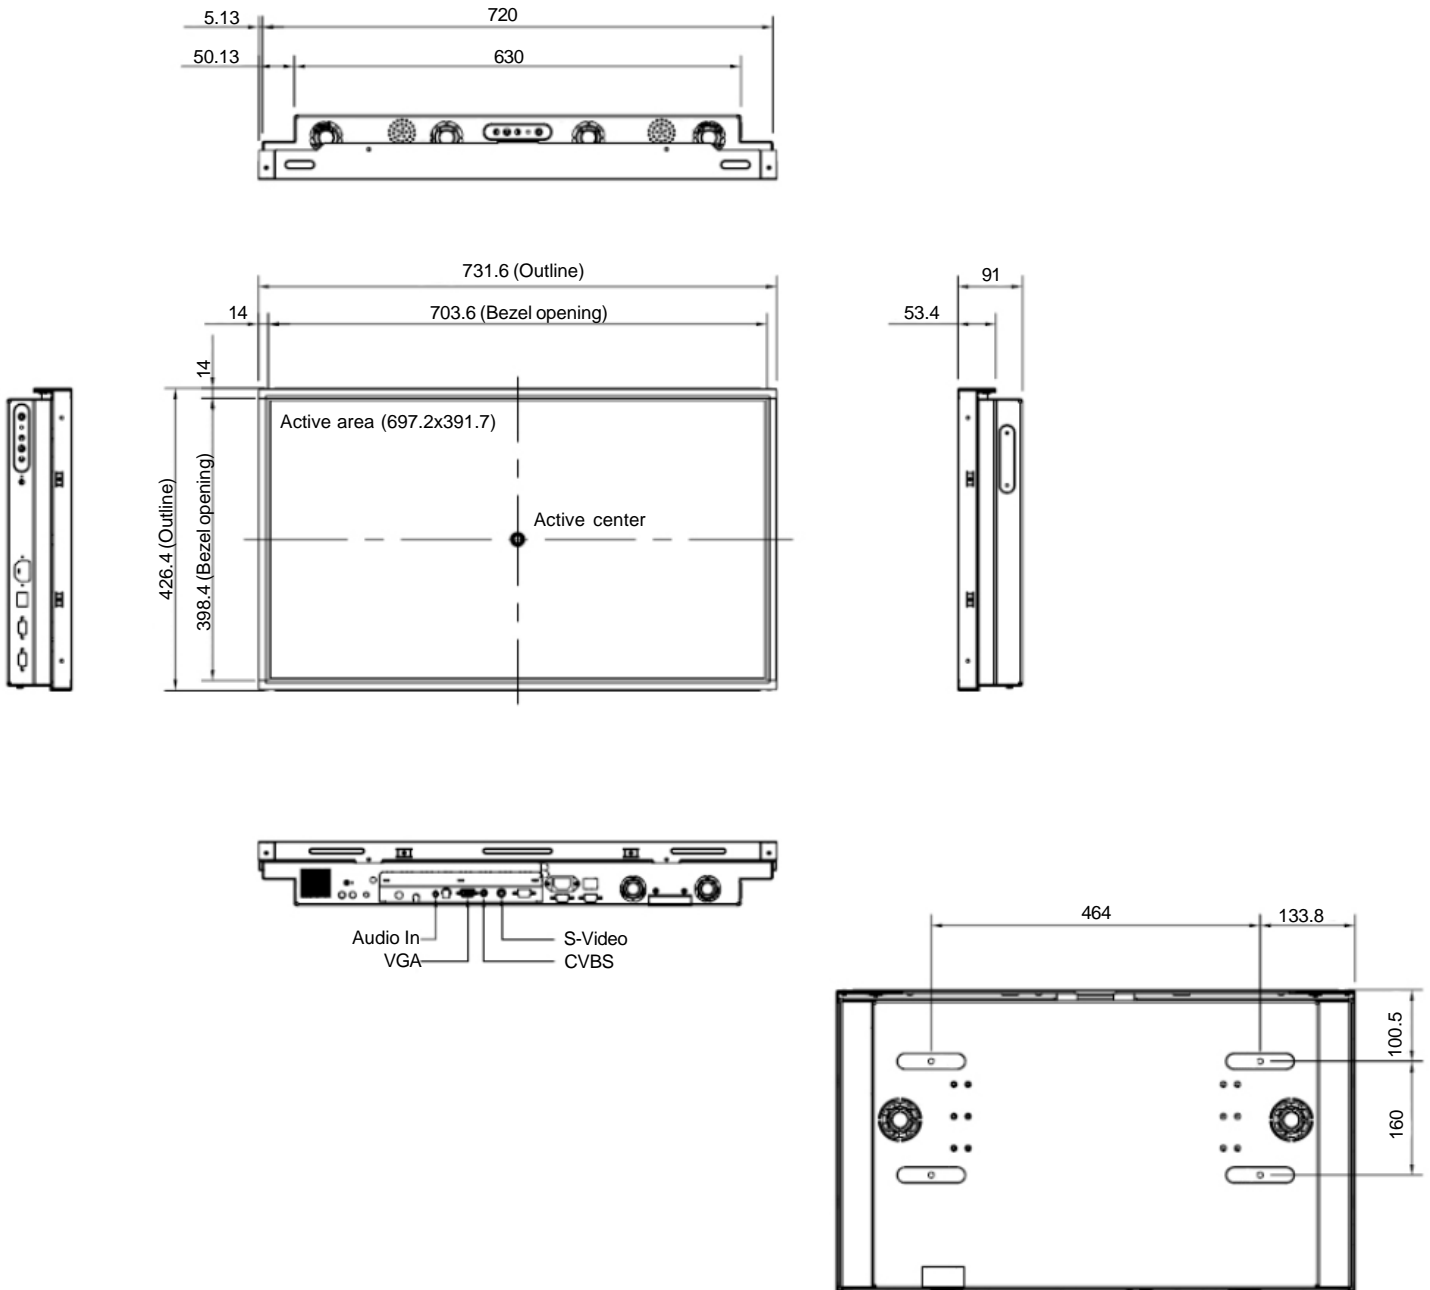

Ordering Information

t.b.d. 32" Open Frame Monitor
LED Backlight, 1.000 nits, WXGA resol.