



32" Open Frame Monitor

t.b.d.

The 32" Open Frame Monitor is a high definition (HD) LCD panel, built-in 1.000 nits high bright for sunlight readable LCD display, high transmittance color filter, high transmission polarizing plates, Low Power Consumption, suitable for kiosk, advertising, POS, marline, transportation, gaming, studio display, gas pump.



Main Features

- Sunlight readable
- LED backlight
- High shock and vibration resistance
- Low power consumption
- High uniformity
- Low EMI noise
- Wide dimming
- Life expectancy

Technical Specifications

Display features

- Description: 32" TFT LCD, LED Backlight 1000nits
- Display Area: 697.7 (H) x 392.3(V) mm
- Brightness: 1.000 cd/m²
- Resolution: 1.366 x 768
- Contrast Ratio: 2.500 : 1
- Pixel Pitch: 0.51(H) x 0.51(V) mm
- Viewing Angle: 176°(H), 176°(V)
- Display Colors: 16.7M
- Response Time: 7ms (Typical)
- Sync: LVDS
- Power Input: 12VDC
- Power Consumption: 81W
- Dimensions: 788.8x340x62mm
- Weight: 9kg (net)
- Operating temperature: 0°C to 50°C

Control Board (Optional)

- VGA+Audio
- VGA+DVI
- VGA+CVBS+S-Video+Audio (Optional DVI / Component)
- VGA+DVI (Optional S-Video/ Component / Audio)

F/R Control Button

- 4 Key: Power Switch, Menu, Select (+,-)

OSD Menu

- Brightness, Contrast, H/V Position, Color, Phase, Clock...

Light sensor


- 0.5nits to 1.000nits

32" Open Frame Monitor

t.b.d.



Outline Dimensions

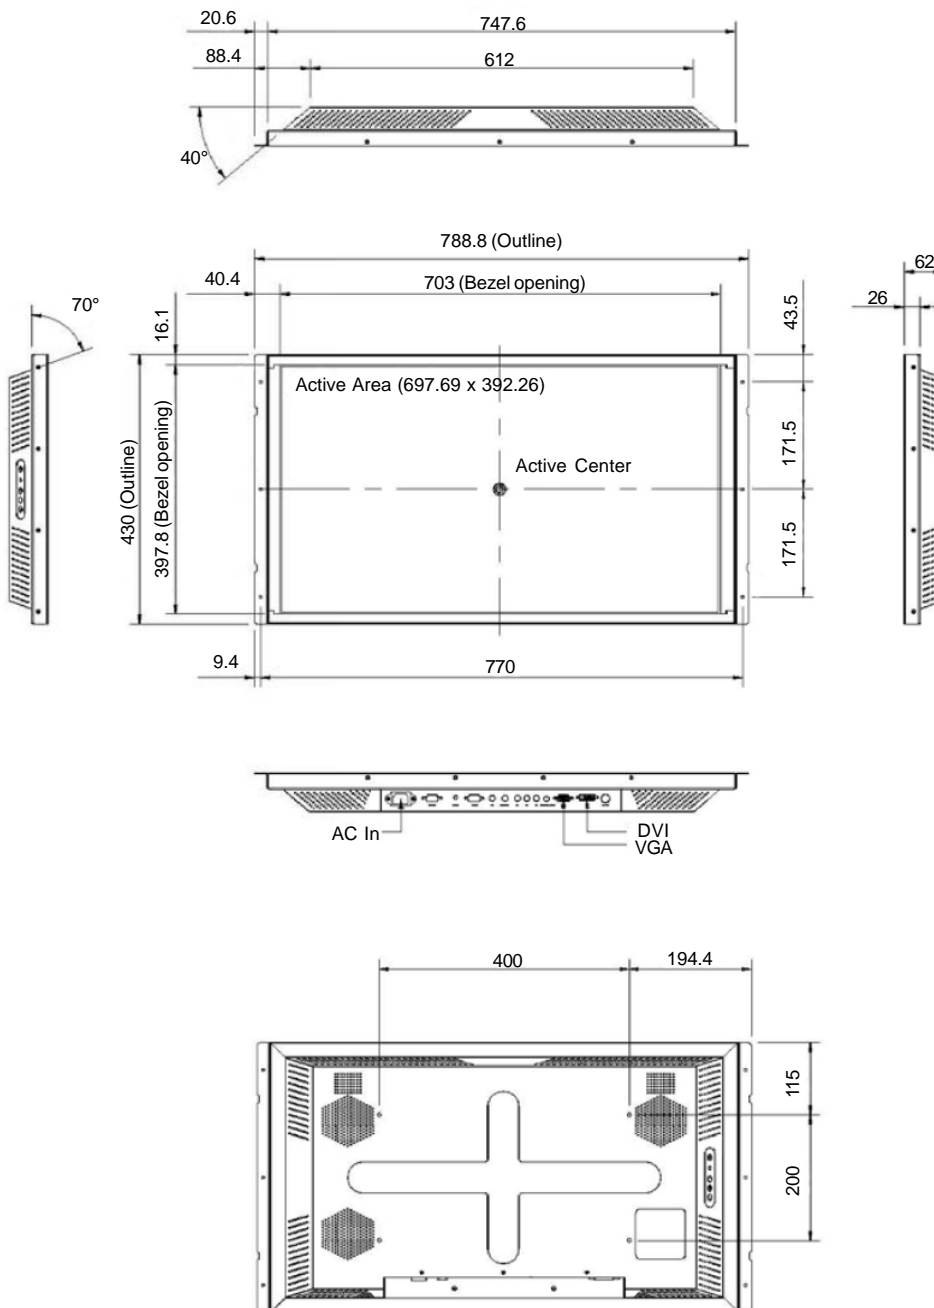

Ordering Information

t.b.d. 32" Open Frame Monitor, w/o TouchScreen
LED Backlight, 1.000 nits, WXGA resol.