




PCI

MICROSPACE®

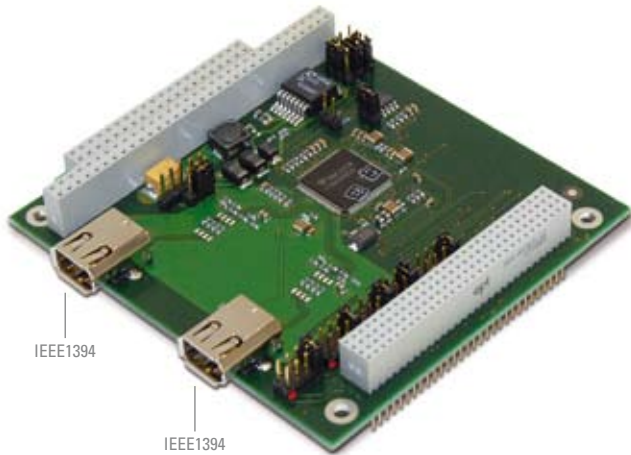

# Highlights

- \_ IEEE 1394 Firewire
- \_ 2 channels
- \_ 400MBit/sec.
- \_ Hotplug
- \_ PC/104: pass-through

# MSMW104+

## Description

The MICROSPACE® PC/104-Plus extension card MSMW104+ has an IEEE1394A Firewire controller. There are two 400 Mbit/s channels available. The drivers are already integrated in Windows and Linux. The peripheral systems are supplied with 12V. The card is connected to the 32 bit PCI bus and requires only one PCI resource.

## Applications

- \_ Measurement engineering
- \_ Video recording (camera)
- \_ Firewire network

## Technical data

Type	MSMW104+
Function	Firewire
ISA-BUS	-
PCI-BUS	yes
PCI Express-BUS	-
BUS compatibility	PC/104-Plus
Controller	TSB43AB22
Memory	-
1 <sup>st</sup> interface	IEEE 1394
2 <sup>nd</sup> interface	IEEE 1394
3 <sup>rd</sup> interface	-
Power normal	3.3V
Power management	-
Operating temperature	-25°C to +70°C
Extended operating temperature	-40°C to +70°C
Size (W x L x H in mm)	90 x 96 x 17
Weight	80 g
Software support	WIN, Linux
MTBF	>200'000h
Special features 1	-
Special features 2	-
Special features 3	-
Artikel Nr. (ISA + PCI)* (only PCI)**	801650* 801652**

## Option/accessories

Article	Description	No.



Manufacturer:

**DIGITAL-LOGIC**  
smart embedded computers

**DELTA COMPONENTS** GmbH · Auweg 27 · D-79761 Waldshut-Tiengen · Tel.: +49/7751/8399-0 · Fax: +49/7751/8399-99  
[www.DeltaCar-PC.de](http://www.DeltaCar-PC.de) [www.delta-components.de](http://www.delta-components.de) E-mail: [info@delta-components.de](mailto:info@delta-components.de)