

# AX60530

6-slot Half-size MicroBox with 150W Power Supply



Embedded Computing Platforms



Rear view

Interior view

## Specifications

Standard Color	Beige (PANTONE 414C)
Construction	Heavy-duty cold-rolled steel
Drive Capacity	Exposed 1 x slim CD-ROM and 1 x 3.5" drives, internal 1 x 3.5"
Cooling	One 90mm x 90mm easy-removable ball-bearing fan with a removable filter
Front Panel Indicators	1 x power, 1 x HDD
Front Panel Controls	1 x system reset; 1 x power on/off
Front Panel Connectors	2 x USB & 1 x PS/2
Pre-punched Panel	2 x 9-pin & 1 x 25-pin
System Board	Half-size SBCs
Expansion Slot	6-slot ISA or PCI backplane
Hold-down Clamp	Rubber cushion
Operation Temperature	0°C (32°F) to 45°C (113°F)
Dimensions	191mm (7.5") (W) x 273mm (10.8") (D) x 195.7mm (7.7") (H)

## Power Supply Specifications

Item	Specifications		MTBF
	Input	Output	
ATX 150W	AC 115/230V (Auto switching)	+5V @ 12A +12V @ 5A -12V @ 1A -5V @ 0.2A +3.3C @ 7A +5VSB @ 2A	100,000 hours

## Backplane Options

Models	Slots per segment (ISA/PCI/CPU)	Segment
ATX6020/6	5/0/1	Single
ATX6021/5	0/4/1	Single

## Features

- ▶ Compact design for embedded applications
- ▶ Supports half-size SBCs
- ▶ Exposed 1 x slim CD-ROM & 1 x 3.5" drives; internal 1 x 3.5" drive
- ▶ Equipped with ATX 150W power supply
- ▶ Easy-removable cooling fan



ECP Services and Solutions

Computer-On-Modules Solutions

Mini ITX SBC

3.5" Capa Boards

EPIC Boards

5.25" Petit Boards & Accessories

Half-size CPU Cards, Backplanes

PC/104 Modules

Mini PCI Modules

Embedded eBOX Systems & MicroBoxes

Power Supplies

Appendix


## Ordering Information

AX60530WB/X150	6-slot Industrial computer chassis, ATX 150W power supply
AX-SLCD	Slim-line CD-ROM
AX-SLCDR	Slim-line CD-RW

## Packing List

- Riser card w/ 2 PCI slots
- Bracket for riser card
- AC power cord

## Dimensions

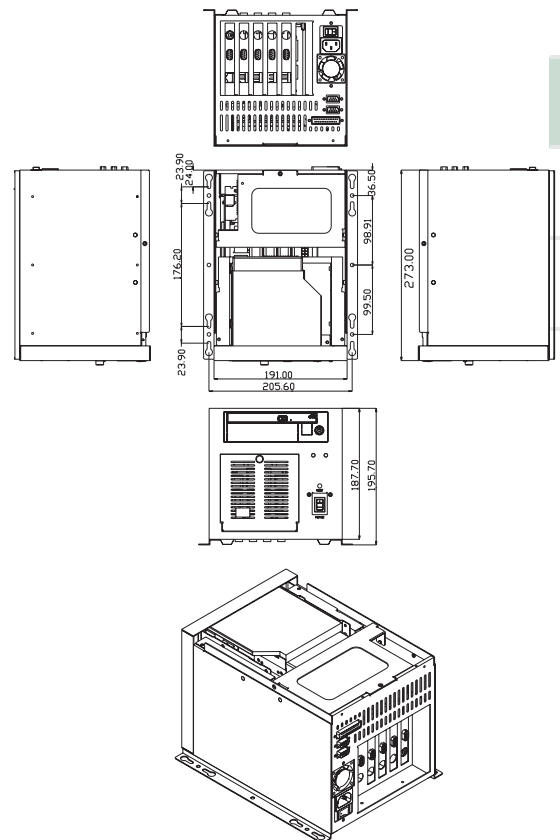

\* All specifications and photos are subject to change without notice.